

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : F16L 9/12, 11/127		A1	(11) International Publication Number: WO 93/25835 (43) International Publication Date: 23 December 1993 (23.12.93)
(21) International Application Number: PCT/US93/05531 (22) International Filing Date: 10 June 1993 (10.06.93)		(74) Agent: GLASSMEYER, Denise, M.; Basile and Hanlon, 1650 West Big Beaver Road, Suite 210, Troy, MI 48084 (US).	
(30) Priority data: 896,824 11 June 1992 (11.06.92) US 897,304 11 June 1992 (11.06.92) US 962,249 16 October 1992 (16.10.92) US		(81) Designated States: JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(71) Applicant: ITT INDUSTRIES, INC. [US/US]; 1105 North Market Street, Suite 1217, Wilmington, DE 19801 (US).		<p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	
(72) Inventors: NOONE, David, L. ; 29200 Candlewood, Southfield, MI 48076 (US). MITCHELL, Frank, L. ; 662 North Main Street, Apt. 103, Rochester, MI 48307 (US).			

(54) Title: MULTI-LAYER FUEL AND VAPOR TUBE

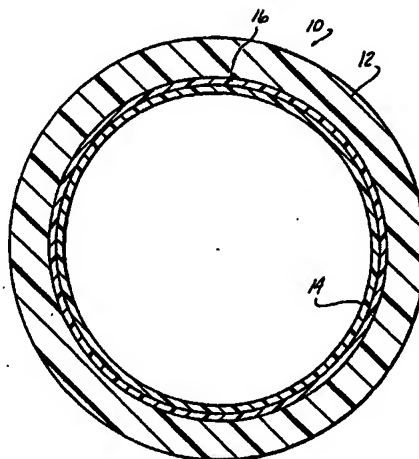

(57) Abstract

A multi-layered tubing (10) for use in a motor vehicle composed of a thick outer tubing (12) having an inner and an outer face, the outer tubing made of an extrudable thermoplastic such as a polyamide; a thin intermediate bonding layer (16) bonded to the inner face of the thick outer layer, the bonding layer composed of an extrudable melt-processible thermoplastic capable of sufficiently permanent laminar adhesion to the polyamide outer tubing; and an inner layer (14) bonded to the intermediate bonding layer, the inner layer composed of an extrudable, melt processible thermoplastic capable of sufficiently permanent laminar adhesion with the intermediate bonding layer. The multi-layer tubing may also include an innermost electroconductive layer and may optionally include an outer jacket.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SK	Slovak Republic
CI	Côte d'Ivoire	LI	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	MC	Monaco	TC	Togo
DE	Germany	MG	Madagascar	UA	Ukraine
DK	Denmark	ML	Mali	US	United States of America
ES	Spain	MN	Mongolia	VN	Viet Nam
FI	Finland				

MULTI-LAYER FUEL AND VAPOR TUBEI. Field of the Invention:

5 The present invention relates to a hose for use in a motor vehicle. More particularly, the present invention relates to a multi-layer hose which can be employed as a fuel line or vapor recovery line in a motor vehicle.

II. Background of the Invention:

10 Single layer fuel lines and vapor return lines of synthetic materials such as polyamides have been proposed and employed in the past. Fuel lines employing such materials generally have lengths of at least several meters. It is important that the line, once installed,
15 not materially change during the length of operation, either by shrinkage or elongation or as a result of the stresses to which the line may be subject during use.

It is also becoming increasingly important that the lines employed be essentially impervious to
20 hydrocarbon emissions due to permeation through the tubing. It is anticipated that future Federal and state regulations will fix the limit for permissible hydrocarbon emissions due to permeation through such lines. Regulations which will be enacted in states such
25 as California will fix the total passive hydrocarbon emission for a vehicle at 2 g/m^2 per 24 hour period as calculated by evaporative emission testing methods such as those outlined in Title 13 of the California Code of Regulations, section 1976, proposed amendment of
30 September 26, 1991. To achieve the desired total vehicle emission levels, a hydrocarbon permeation level for the lines equal to or below 0.5 g/m^2 per 24 hour period would be required.

Finally, it is also imperative that the fuel
35 line employed be impervious to interaction with corrosive materials present in the fuel such as oxidative agents and surfactants as well as additives such as ethanol and methanol.

-2-

Various types of tubing have been proposed to address these concerns. In general, the most successful of these have been co-extruded multi-layer tubing which employ a relatively thick outer layer composed of a material resistant to the exterior environment. The innermost layer is thinner and is composed of a material which is chosen for its ability to block diffusion of materials such as aliphatic hydrocarbons, alcohols and other materials present in fuel blends, to the outer layer. The materials of choice for the inner layer are polyamides such as Nylon 6, Nylon 6.6, Nylon 11, and Nylon 12.

Alcohol and aromatic compounds in the fluid conveyed through the tube diffuse at different rates through the tubing wall from the aliphatic components. The resulting change in the composition of the liquid in the tubing can change the solubility thresholds of the material so as, for example, to be able to crystallize monomers and oligomers of materials such as Nylon 11 and Nylon 12 into the liquid. The presence of copper ions, which can be picked up from the fuel pump, accelerates this crystallization. The crystallized precipitate can block filters and fuel injectors and collect to limit travel of the fuel-pump or carburetor float as well as build up on critical control surfaces of the fuel pump.

In U.S. Patent Number 5,076,329 to Brunnhofer, a five-layer fuel line is proposed which is composed of a thick corrosion-resistant outer layer formed of a material known to be durable and resistant to environmental degradation such as Nylon 11 or Nylon 12. The tubing disclosed in this reference also includes a thick intermediate layer composed of conventional Nylon 6. The outer and intermediate layers are bonded together by a thin intermediate bonding layer composed of a polyethylene or a polypropylene having active side chains of maleic acid anhydride. An thin inner layer of a rcondensed Nylon 6 with a low monomer content is

-3-

employed as the innermost region of the tubing. The use of Nylon 6 as the material in the inner fluid contacting surface is designed to eliminate at least a portion of the monomer and oligomer dissolution which would occur with Nylon 11 or Nylon 12. The thin innermost layer is bonded to the thick intermediate layer by a solvent blocking layer formed of a copolymer of ethylene and vinyl alcohol with an ethylene content between about 30% and about 45% by weight. The use of a five layer system was mandated in order to obtain a tubing with the impact resistance of Nylon 12 with the low monomer/oligomer production of Nylon 6. It was felt that these characteristics could not be obtained in a tubing of less than five layers.

In U.S. Patent Number 5,038,833 also to Brunnhofer, a three-layer fuel line without the resistance to monomer/oligomer dissolution is proposed in which a tube is formed having a co-extruded outer wall of Nylon 11 or Nylon 12, an intermediate alcohol barrier wall formed from an ethylene-vinyl alcohol copolymer, and an inner water-blocking wall formed from a polyamide such as Nylon 11 or Nylon 12. In DE 40 06 870, a fuel line is proposed in which an intermediate solvent barrier layer is formed of unmodified Nylon 6.6 either separately or in combination with blends of polyamide elastomers. The internal layer is also composed of polyamides, preferably modified or unmodified Nylon 6. The outer layer is composed of either Nylon 6 or Nylon 12.

Another tubing designed to be resistant to alcoholic media is disclosed in UK Application Number 2 204 376 A in which a tube is produced which has an thick outer layer composed of 11 or 12 block polyamides such as Nylon 11 or Nylon 12 which may be used alone or combined with 6 carbon block polyamides such as Nylon 6 or 6.6 Nylon. The outer layer may be co-extruded with an inner layer made from alcohol-resistant polyol fin co-polymer

-4-

such as a co-polymer of propylene and maleic acid. The inner layer is zinc chloride resistant Nylon 6.

Heretofore it has been extremely difficult to obtain satisfactory lamination characteristics between dissimilar polymer layers. Thus all of the multi-layer tubing proposed previously has employed polyamide-based materials in most or all of the multiple layers. While many more effective solvent-resistant chemicals exist, their use in this area is limited due to limited elongation properties, strength and compatibility with Nylon 11 and 12.

Thus it would be desirable to provide a tubing material which could be employed in motor vehicles which would be durable and prevent or reduce permeation of organic materials therethrough. It would also be desirable to provide a tubing material which would be essentially nonreactive with components of the liquid being conveyed therein.

SUMMARY OF THE INVENTION

The present invention is a multi-layer tube which can be used on motor vehicles for applications such as in a fuel line or a vapor return or recovery line. In the first and second embodiments of the present invention, the tube is composed of:

a thick flexible outer tubing having an inner and an outer face, the outer tubing consisting essentially of an extrudable melt processible thermoplastic having an elongation value of at least 150% and an ability to withstand impacts of at least 2 ft/lbs at temperatures below about -20°C, the melt processible thermoplastic selected from the group consisting of six-carbon block polyamides, twelve-carbon block polyamides, eleven-carbon block polyamides, and mixtures thereof or thermoplastic elastomers commercially available under the trade names SANTOPRENE, KRATON, SARLINK, and VICHEM;

a thin intermediate bonding layer bonded to the inner face of the thick outer layer, the bonding layer

-5-

consisting essentially of an extrudable melt processible thermoplastic capable of sufficiently permanent laminar adhesion to the outer tubing; and

5 an inner hydrocarbon barrier layer bonded to the intermediate bonding layer, the inner layer consisting of an extrudable melt processible thermoplastic capable of sufficiently permanent laminar adhesion with the intermediate bonding layer, the thermoplastic material in the interior layer having an
10 elongation value of at least 150% and an ability to withstand impacts of at least two ft/lbs below about -20°C.

In the third embodiment of the present invention, the tube is composed of:

15 a thick outer tubing having a given thickness and an inner and an outer face, the outer tubing consisting essentially of an extrudable thermoplastic having an elongation value of at least 150% and an ability to withstand impacts of at least 2 ft/lbs at
20 temperatures below about -20°C;

a thin intermediate bonding layer bonded to the inner face of the thick outer layer, the bonding layer consisting essentially of an extrudable melt-processible thermoplastic capable of sufficiently permanent laminar
25 adhesion to the outer layer;

an interior layer bonded to the intermediate bonding layer, the interior layer consisting essentially of an extrudable, melt-processible thermoplastic material capable of sufficiently permanent laminar adhesion with
30 the intermediate bonding layer, the thermoplastic material containing as a major constituent, a thermoplastic which is chemically dissimilar to the thermoplastic employed in the thick outer layer, the chemically dissimilar thermoplastic being resistant to
35 perm ation and interaction with short chain aliphatic and aromatic compounds; and

-6-

an innermost electrostatic discharge integrally bonded to the multi-layer tubing, the electrostatic discharge layer consisting essentially of an extrudable, melt-processible thermoplastic material having an electrostatic dissipation capacity in a range between about 10^{-4} and about 10^{-9} ohm/cm².

The tubing of the present invention may also include an optional outer jacket composed of a suitable melt-processible thermoplastic which is either co-extruded or applied in a separate processing operation. The thermoplastic material employed in the optional outer jacket may be any suitable material which adds insulative or cushioning properties to the tubing jacket. The outer tubing jacket may also, optionally, be capable of dissipating electrostatic energy, the electrostatic dissipation capacity being in a range between about 10^{-4} to 10^{-9} ohm/cm².

DESCRIPTION OF THE DRAWING

The objects, features and advantages of the present invention will become more readily apparent from the following description, reference being made to the following drawing in which:

Fig. 1 is a sectional view through a piece of tubing of the first and second embodiments of the present invention; and

Fig. 2 is a sectional view through a piece of tubing of the third embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The present invention is a multi-layer fuel line and vapor tube which contains at least one bonding layer and at least an outer and an inner tubing layer. The tubing of the present invention may also include at least one conductive layer. The tubing of the present invention is, preferably, fabricated by co-extruding given thermoplastic materials in a conventional co-extrusion process. The tubing may either be co-extruded to a suitable length or may be co-extruded in continuous

-7-

length and cut to fit the given application subsequently. The tubing of the present invention may have an outer diameter up to 50 mm. However, in applications such as fuel lines and vapor recovery systems, outer diameter of up to 2 to 2.5 inches are preferred.

5 The material may have any suitable wall thickness desired. However, in automotive systems such as those described herein, wall thicknesses between 0.5 mm and 2 mm are generally employed with wall thicknesses of approximately 0.8 to 1.5 mm being preferred. While it is within the scope of this invention to prepare a tubing material having a plurality of overlaying layers of various thermoplastic materials, the tubing of the present invention generally has a maximum of five layers inclusive of the bonding layers but excluding any outer jackets. In the first and second embodiments of the present invention, the tubing material has three or four. In the third embodiment of the present invention, the tubing material has five.

20 The tubing 10 of the present invention is a material which is suitable for use in motor vehicles and comprises a relatively thick outer layer 12 which is non-reactive with the external environment and can withstand various shocks, vibrational fatigue, and changes in temperature as well as exposure to various corrosive or degradative compounds to which it would be exposed through the normal course of operation of the motor vehicle.

30 It is anticipated that both the outer tubing layer 12 as well as any interior layers bonded thereto would be suitable for use at an outer service temperature range between about -40°C and about 150°C, with a range of -20°C to 120°C being preferred. The various layers of tubing are integrally laminated to one another and resistant to delamination throughout the lifetime of the tubing. The tubing of the present invention has a tensile strength of no less than 25N/mm² and an

-8-

elongation value of at least 150%. The tubing has a burst strength at 23°C and 120°C of at least 20 bar. The multi-layer tubing of the present invention is sufficiently resistant to exposure to brake fluid, engine oil and peroxides such as those which may be found in gasoline.

The outer layer 12 may be composed of any melt-processible extrudable thermoplastic material which is resistant to ultra violet degradation, extreme changes in heat and exposure to environmental hazards such as zinc chloride, and degradation upon contact with engine oil and brake fluid. In general, in the first embodiment of the present invention, the outer layer 12 as depicted in Fig. 1 consists essentially of six-carbon block polyamides, such as Nylon 6, which are resistant to degradation upon exposure to zinc chloride. In the second embodiment of the present invention as depicted in Fig. 1 and third embodiment of the present invention as depicted in Fig. 2, the exterior layer is composed of a thermoplastic selected from the group consisting of twelve-carbon block polyamides, eleven-carbon block polyamides, zinc chloride resistant six-carbon block polyamides, and mixtures thereof as well as selected thermoplastic elastomers. The thermoplastic elastomers are proprietary compositions and commercially available under trade names such as SANTOPRENE, KRATON, SARLINK and VICHEM.

The materials which compose the outer layers can be employed in their respective unmodified states or can be modified with various plasticizers, flame retardants and the like in manners which would be known to one reasonably skilled in the art. In general, the respective materials which make up the outer layer 12 may be composed of any melt-processible extrudable thermoplastic material which is resistant to ultra violet degradation, extreme changes in heat and exposure to

-9-

environmental hazards such as zinc chloride, and degradation upon contact with engine oil and brake fluid.

In the first embodiment of the present invention, the exterior layer consists essentially of six-carbon block polyamides, such as Nylon 6, which either inherently exhibit sufficient resistance or contain effective amounts of suitable modifying agents to achieve such resistance to degradation upon exposure to zinc chloride.

The Nylon 6 which composes the outer layer can be employed can also be modified with various plasticizers, flame retardants and the like in manners which would be known to one reasonably skilled in the art.

In the first embodiment, the outer layer 12 is, preferably composed of a polyamide thermoplastic derived from the condensation polymerization of caprolactam. Such materials are commonly referred to as six-carbon block polyamides or Nylon 6. In this embodiment, the six-carbon block polyamide contains sufficient quantities of modifying agents to impart a level of zinc chloride resistance greater than or equal to that required by test method SAE J844; non-reactivity after 200 hour immersion in a 50% by weight aqueous zinc chloride solution. In the preferred embodiment, the six-carbon block polyamide material is a multi-component system comprised of a Nylon-6 copolymer blended with other Nylons and olefinic compound. The zinc-chloride resistant Nylon-6 of choice will have a melt temperature between about 220°C and 240°C. Examples of thermoplastic materials suitable for use in the tubing of the present invention are propriety materials which can be obtained commercially under the trade names M-7551 from NYCOA Corporation and ALLIED 1779 from Allied Chemical.

The six-carbon black polyamide may, optionally, include other modifying agents such as various plasticizing agents generally present in amounts between

-10-

about 1.0% and about 13% by total weight of the thermoplastic composition. as are readily known in the art. The polyamide material employed, preferably, is an impact-modified material capable of withstanding impacts of at least 2 ft. lbs. at temperatures below about -20°C.

5 In the second and third embodiments of the present invention, the outer layer 12 is composed of a thermoplastic selected from the group consisting of twelve-carbon block polyamides, eleven-carbon block polyamides as well as zinc chloride resistant six-carbon block polyamides, or thermoplastic elastomers. These thermoplastic elastomers are proprietary compositions and commercially available under trade names such as SANTOPRENE, KRATON, SARLINK and VICHEM. The materials which compose the outer layer in the second embodiment can be present in their unmodified state or can be modified with various plasticizers, flame retardants and the like in manners which would be known to one reasonably skilled in the art.

20 In the second and third embodiments, a polyamide such as Nylon 12 is, preferably, effectively employed. It is anticipated that a thermoplastic such as Nylon 12 may be either modified or unmodified. If modified, it is anticipated that the material will contain various plasticizers as are readily known in the art. In the second embodiment, the polyamide will contain up to 17% by composition weight plasticizer; with amounts between about 1% and about 13% being preferred.

30 In the present invention, the outer layer 12 has a wall thickness sufficient to provide suitable strength and endurance to the multi-layer tubing of the present invention. In applications involving automotive vehicles, the outer layer 12 comprises between about 50% and about 60% of the total wall thickness. In general, 35 in the first embodiment, the outer layer has a wall thickness between about 0.5 mm and about 0.8 mm; with a

-11-

preferred wall thickness between about 0.6 mm and about 0.7 mm.

5 In the second embodiment, the outer layer 12, preferably, has a wall thickness between about 0.5 mm and about 1 mm with a preferred range being between about 0.6 mm and about 0.8 mm. In the third embodiment, the Nylon 12 outer layer 12 preferably has a wall thickness between about 0.5 mm and about 0.8 mm; with a preferred range between about 0.6 and about 0.75 mm. As indicated 10 previously, the tubing material of the present invention can be extruded by conventional co-extrusion methods to any continuous length desired.

The intermediate bonding layer 14 is integrally bonded to the inner surface of the thick outer polyamide 15 layer 12. In the first and second embodiments of the present invention, the intermediate bonding layer 14 is a chemically dissimilar permeation resistant, chemical resistant, fuel resistant thermoplastic material which is melt processible in normal ranges of extrusion, i.e. 20 about 175° to about 250°C. By the term "chemically dissimilar" it is meant that the intermediate bonding layer 14 consists essentially of a non-polyamide material which is capable of adhesion to a bonding layer interposed between the thick outer layer and the inner 25 layer in a manner which will be described subsequently.

The material employed in the intermediate bonding layer is a thermoplastic material which permits the establishment of a homogeneous bond between the inner and outer layers and exhibits properties of resistance to 30 permeation of aliphatic and aromatic materials such as those found in fuel. The thermoplastic material employed herein is preferably a melt-processible co-extrudable thermoplastic which may or may not contain various plasticizers and other modifying agents. In general, the 35 material employed in the intermediate bonding layer is a more elastic material than that employed in the associated inner layer.

-12-

In the first embodiment, the thermoplastic material which comprises the intermediate bonding layer 14 is a thermoplastic material selected from the group consisting of co-polymers of substituted or unsubstituted alkenes having less than four carbon atoms and vinyl alcohol, alkenes having less than four carbon atoms and vinyl acetate, and mixtures thereof. In this embodiment, the thermoplastic material employed will be resistant to permeation by and interaction with short chain aromatic and aliphatic compounds such as those which would be found in gasoline.

The preferred material employed in the first embodiment is a copolymer of ethylene and vinyl alcohol which has an ethylene content between about 27% and about 35% by weight with an ethylene content between about 27% and about 32% being preferred. Examples of suitable materials which can be employed in the tubing of the present invention include ethylene vinyl alcohol commercially available from EVA/LA.

In the first embodiment, the thermoplastic material employed in the intermediate bonding layer 14 is capable of serving as a hydrocarbon barrier to prevent significant permeation of the aromatic and aliphatic components of gasoline through to the polyamide outer layer of the tubing and thus, out to the surrounding environment. The effectiveness of the barrier layer at preventing such permeation will vary depending on numerous factors including but not limited to the thickness and composition of the inner layer, the thickness of the bonding layer and the composition of the materials conveyed through the tubing. It is anticipated that the bonding layer will be capable of providing the tubing of the present invention with a passive hydrocarbon permeation level less than about 0.5 g/m² per 24 hour.

In the second embodiment, the thermoplastic material which comprises the interior bonding layer 16 is

-13-

a thermoplastic polyester derived from ethylen glycol selected from the group consisting of polybutylene terephthalate, polyethylene terephthalate, polyteremethylene terephthalate, and mixtures thereof.

5 The preferred material is polybutylene terephthalate. Suitable material is commercially available under the trade name 1607 ZE40 from Hüls of Dusseldorf, Germany.

In the second embodiment, the thermoplastic material employed in the intermediate bonding layer 16

10 also exhibits characteristics which permit resistance to permeation by short chain aromatic and aliphatic compounds. These permeation resistant characteristics synergistically interact with the inner polyamide layer such that the total permeation resistance is unexpectedly

15 increased when the thermoplastic interior layer is bonded to the inner polyamide layer. Thus, the resistance to permeation to short chain aromatic and aliphatic hydrocarbons exhibited by the multi-layer material exceeds the permeation resistance exhibited by individual

20 layers of either polybutylene terephthalate or polyamide of a thickness equal to or greater than the multi-ply composite of the present invention.

In the first and second embodiments, the material employed in the intermediate bonding layer 14

25 can, optionally, exhibit conductive characteristics rendering it is capable of dissipation of electrostatic charges in the range of 10^{-4} to 10^{-9} ohm/cm². The thermoplastic material employed in the present invention may include, in its composition, a conductive media in

30 sufficient quantity to permit electrostatic dissipation in the range defined. The conductive media may be any suitable material of a composition and shape capable of effecting this static dissipation. The conductive material may be selected from the group consisting of

35 elemental carbon, stainless steel and highly conductive metals such as copper, silver, gold, nickel, silicon and mixtures thereof. The term "elemental carbon" as used

-14-

herein is employed to describe and include materials commonly referred to as "carbon black". The carbon black can be present in the form of carbon fibers, powders, spheres, and the like.

5 The amount of conductive material contained in the thermoplastic is generally limited by considerations of low temperature durability and resistance to the degradative effects of the gasoline or fuel passing through the tubing. The amount of conductive material
10 employed may be that amount sufficient to impart electrostatic dissipation characteristics to the tubing. When employed, the maximum amount of conductive material in the thermoplastic material is less than 5% by volume.

 The conductive material can either be
15 interstitially integrated into the crystalline structure of the polymer or can be co-polymerized therewith. Without being bound to any theory, it is believed that carbon-containing materials such as carbon black may be subject to carbon co-polymerization with the surrounding
20 thermoplastic material. Materials such as stainless steel are more likely to be interstitially integrated into the crystalline structure of the polymer.

 The intermediate bonding layer 14 serves to bond the thick outer layer 12 to the inner layer 16 to
25 form a secure laminar bond therebetween. The inner layer 16 provides a stable fuel-contacting surface on the interior of the tube 10.

 In the third embodiment, the tubing 10 of the present invention also includes an intermediate bonding
30 layer 14 adhering and attached to the inner surface of the thick outer layer 12. The intermediate bonding layer 14 may be co-extruded with the other layers and is composed of a material which is capable of achieving a suitable homogeneous bond between itself, the thick outer
35 layer and any inner layers interposed thereon. The intermediate bonding layer 14 is generally composed of a

-15-

more elastic material than that employed in inner layers, the compositions of which will be described subsequently.

In the third embodiment, the intermediate bonding layer 14 is composed of a thermoplastic material which may exhibit properties of resistance to the permeation of aliphatic and aromatic materials such as those found in fuel in addition to exhibiting suitable bonding characteristics. The thermoplastic material employed herein is preferably a melt-processible co-extrudable fluoroplastic blend which may optionally contain various plasticizers and other modifying agents. The intermediate bonding layer 14 is, preferably, a blend containing polyvinylidene difluoride polymers, polyvinyl fluoride polymers, or mixtures thereof which exhibit an infinity to conventional polymers such as Nylon 12. In the preferred embodiment, polyvinylidene difluoride is employed. One such polymeric material suitable for use in the multi-layer tubing of the present invention is commercially available from Central Glass of Ube City, Japan under the trade designation CEFRAL SOFT XUA-2. This proprietary material is a graft copolymer of a fluorine-containing elastomeric polymer with a fluorine-containing crystalline polymer. The elastomeric polymer is, preferably, a material copolymerized from an alkyl difluoride selected from the group consisting of vinyl difluoride, vinylidene difluoride, and mixtures thereof, and a chlorofluoroalkene selected from the group consisting of ethylene chlorotrifluoroethylene. The crystalline polymer is preferably a haloalkene such as ethylene chlorotrifluoroethylene.

In the third embodiment, the bonding layer 14 is the product of the copolymerization of ethylene chlorotrifluoroethylene and a vinylidene difluoride chlorotrifluoroethylene copolymer having a melting point between about 180°C and about 210°C and a molding temperature between about 230°C and about 260°C.

-16-

The inner layer 16 may be composed of any melt-processible extrudable thermoplastic material which is resistant to ultra violet degradation, extreme changes in heat and exposure to gasoline and its additives. The material of choice may also exhibit resistance to environmental hazards such as exposure to zinc chloride, and resistance to degradation upon contact with materials such as engine oil and brake fluid.

In the first embodiment, the preferred material is a polyamide derived from the condensation polymerization of caprolactam. Suitable materials are commonly referred to as six-carbon block polyamides or Nylon 6. The six-carbon block polyamides employed herein may contain various plasticizers, fire retardants and the like as well as sufficient quantities of modifying agents to impart a level of zinc chloride resistance greater than or equal to that required by test method SAE J844: i.e. non-reactivity after 200 hour immersion in a 50% by weight aqueous zinc chloride solution.

In the first embodiment, the six-carbon block polyamide material employed is a multi-component system comprised of a Nylon-6 copolymer blended with other Nylons and olefinic compounds. The six-carbon block polyamide material of choice will is preferably resistant to zinc chloride and has a melt temperature between about 220°C and 240°C. Examples of thermoplastic materials suitable for use in the tubing of the present invention are propriety materials which can be obtained commercially under the trade names M-7551 from NYCOA Corporation and ALLIED 1779 from Allied Chemical.

In instances where the six-carbon block polyamide material employed in the first embodiment of the present invention includes plasticizing agents, these materials are generally present in amounts between about 1.0% and about 13% by total weight of the thermoplastic composition. The polyamide material employed, preferably, is an impact-modified material capable of

-17-

withstanding impacts of at least 2 ft. lbs. at temperatures below about -20°C.

In the first embodiment, the inner layer 16 may also contain suitable material in sufficient quantities to impart electrostatic conductivity characteristics to the tubing of the present invention. When employed, the material is preferably capable of dissipation of electrostatic charges in the range of 10^{-4} to 10^{-9} ohm/cm². The thermoplastic material employed in the present invention may include, in its composition, a conductive media in sufficient quantity to permit electrostatic dissipation in the range defined. The conductive media may be any suitable material of a composition and shape capable of effecting this static dissipation. The conductive material may be selected from the group consisting of elemental carbon, stainless steel and highly conductive metals such as copper, silver, gold, nickel, silicon and mixtures thereof. The term "elemental carbon" as used herein is employed to describe and include materials commonly referred to as "carbon black". The carbon black can be present in the form of carbon fibers, powders, spheres, and the like.

The amount of conductive material contained in the thermoplastic is generally limited by considerations of low temperature durability and resistance to the degradative effects of the gasoline or fuel passing through the tubing. The amount of conductive material employed may be that amount sufficient to impart electrostatic dissipation characteristics to the tubing. When employed, the maximum amount of conductive material in the thermoplastic material is less than 5% by volume.

The conductive material can either be interstitially integrated into the crystalline structure of the polymer or can be co-polymerized therewith. Without being bound to any theory, it is believed that carbon-containing materials such as carbon black may be subject to carbon co-polymerization with the surrounding

-18-

thermoplastic material. Materials such as stainless steel are more likely to be interstitially integrated into the crystalline structure of the polymer.

In the second embodiment, the thermoplastic material employed in the inner layer 14 is a melt-processible extrudable thermoplastic material resistant to extreme changes in heat and exposure to chemical intervals such as are found in engine oil and brake fluid. The thermoplastic material of choice is, preferably, chemically similar in structure and composition to the thermoplastic material employed in the thick outer layer. As used herein, the term "chemically similar material" is defined as a thermoplastic material selected from the group consisting of 12 carbon block polyamides, 11 carbon block polyamides as well as zinc chloride resistant 6 carbon block polyamides, thermoplastic elastomers and mixtures thereof. The thermoplastic elastomers which can successfully be employed in the tubing of the present invention are proprietary compositions commercially available under trade names such as SANTOPRENE, KRATON, SARLINK and VICHEM. The thermoplastic material employed in the inner layer of the tubing of the present invention either may be identical to the material employed in the thick outer layer or may be a different thermoplastic selected from those listed to take advantage of specific properties of the various thermoplastics. In the preferred embodiment, the inner layer 14 is composed of a material similar to or identical to the thick outer layer. In the preferred embodiment, a polyamide such as Nylon 12 can be effectively employed.

In the second embodiment, the thermoplastic employed in the inner layer 14 may be either modified or unmodified. If modified, it is anticipated that the material will contain various plasticizers as are readily known in the art. In the preferred embodiment, the polyamide will contain up to 17% by composition weight

-19-

plasticizer; with amounts between about 1% and about 13% being preferred.

5 In the first embodiment, the inner layer has the minimum wall thickness sufficient to achieve the permeation resistance desired. In general, the inner layer is thinner than the outer layer with the thickness of the outer layer being between about 50% and about 60% of the total wall thickness of the tubing or between 55% and 60% of the thickness of the thick outer layer. In 10 the specified embodiment, the inner wall thickness is between about 0.01 mm and about 0.2 mm with a thickness of about 0.05 mm to about 0.17 mm being preferred. The intermediate bonding layer generally may have a thickness less than or equal to that of the inner layer.

15 In the second embodiment, the inner layer 14 may have a thickness sufficient to supply strength and chemical resistance properties to the multi-layer tubing. Specifically, the inner layer 14 is of sufficient thickness to impede permeation of aliphatic and aromatic 20 hydrocarbon molecules and migration of those molecules through to the thick outer layer. In the present invention, the inner layer has a wall thickness less than that of the thick outer layer. In the preferred embodiment, the inner layer has a wall thickness between 25 about 10% and 25% that of the outer layer; preferably less than between about 0.05 mm and about 0.4 mm; with a wall thickness between about 0.1 mm and about 0.3 mm being preferred.

In the first embodiment, the intermediate 30 bonding layer is of sufficient thickness to permit an essentially homogeneous bond between the inner and outer layers. In general, the intermediate bonding layer can be thinner than the other two layers and can constitute between about 10% and about 50% of the total wall thickness or between about 20% and about 30% of the 35 thickness of the outer layer. In the specified embodiment, the thickness of the intermediate bonding

about 0.25 mm with a
and about 0.20 mm being

, the inner layer 14
ained at the minimum
ermeation of the fuel
e thick outer layer and
nt. It is preferred
rmeation through the
e no greater than 0.5
our interval. It is
both the inner and
ed to accomplish this
, the inner layer has a
nd about 0.2 mm with a
t 0.2 mm being

ing layer generally has
that of the inner
ate bonding layer has a
nd about 0.2 mm with a
d about 0.2 mm being

, the next layer is an
ed of a chemically
chemical resistant, fuel
which is melt-
extrusion, i.e. about
n "chemically dissimilar"
yer 16 is a non-polyamide
esion to the interior
een the thick outer layer

iment, the thermoplastic
erior layer 16 is
ng of polyvinylidene
d mixtur s thereof. The
polymer of the preceding

-21-

materials together with a fluorine-containing polymer such as copolymers of vinylidene fluoride and chlorotrifluoroethane. Suitable material employed would contain between about 60% and about 80% by weight polyvinylidene difluoride. Materials so formed have a melting point between about 200 and about 220°C and a molding temperature between about 210 and about 230°C.

In the third embodiment, the multi-layer tubing of the present invention also includes an innermost electrostatic dissipation layer 18 which is also capable of serving as a hydrocarbon barrier to assist in the prevention of permeation of aromatic and aliphatic compounds found in gasoline through to the outer layer 12 of the tubing and, thus, out to the surrounding environment.

In this third embodiment, the innermost layer 18 is integrally bonded to the inner surface of the interior layer 16. In the present invention, the interior layer 18 is composed of a thermoplastic material which is chemically dissimilar to the thermoplastic material employed in the outer layer 12 which is melt-processible in the normal ranges of extrusion, i.e. about 175°C to about 250°C. The thermoplastic material employed in the innermost layer 18 is capable of sufficiently permanent laminar adhesion to the interior layer 16.

In the third embodiment, the thermoplastic material which comprises the innermost layer 18 is selected from the group consisting of polyvinylidene fluoride, polyvinyl fluoride, and mixtures thereof. The preferred material is a polyvinylidene fluoroplastic derived from the thermal dihalogenation of chlorodifluoroethane. Suitable material is commercially available under the trade name XPV-504KRC CEFRAL SOFT CONDUCTIVE. Alternately, the innermost layer 18 may be composed of a modified material which is chemically similar to the interior layer 16.

-22-

The innermost layer 18 exhibits electrostatic conductive characteristics in that it is capable of dissipation of electrostatic charge in the range of 10^{-4} to 10^{-9} ohm/cm². The fluoroplastic material employed in the present invention may be inherently conductive in these ranges or, preferably, includes in its composition a conductive media in sufficient quantity to permit electrostatic dissipation in the range defined. The conductive material may be any suitable material of a composition and shape capable of effecting this static dissipation. The conductive material may be selected from the group consisting of elemental carbon, stainless steel and highly conductive metals such as copper, silver, gold, nickel, silicon and mixtures thereof. The term "elemental carbon" as used herein is employed to describe and include materials commonly referred to as "carbon black". The carbon black can be present in the form of carbon fibers, powders, spheres, and the like.

The amount of conductive material contained in the fluoroplastic is generally limited by considerations of low temperature durability and resistance to the degradative effects of the gasoline or fuel passing through the tubing. In the preferred embodiment, the fluoroplastic material contains conductive material in an amount sufficient to effect electrostatic dissipation. However, the maximum amount employed therein is less than 5% by volume.

The conductive material can either be interstitially integrated into the crystalline structure of the polymer or can be co-polymerized therewith. Without being bound to any theory, it is believed that carbon-containing materials such as carbon black may be subject to carbon co-polymerization with the surrounding fluoroplastic material. Material such as stainless steel are more likely to be interstitially integrated into the crystalline structure of the polymer.

-23-

In the third embodiment, the innermost layer 18 is maintained at thicknesses suitable for achieving static dissipation and suitable laminar adhesion respectively; generally between about 10% and 20% of the thick outer layer. The thickness of the innermost layer 18 is preferably between about 0.1 mm and about 0.2 mm. The intermediate bonding layer preferably has a thickness approximately equal to the thickness of the innermost layer preferably between about 0.05 mm and about 0.15 mm.

In the third embodiment, the interior layer 16 is maintained at a thickness suitable to achieve a hydrocarbon permeation value for the tubing of the present invention no greater than about 0.5 g/m² in a 24 hour interval. To accomplish this, the characteristics of the interior layer 16 can be relied upon solely or in concert with the intermediate bonding layer. It is anticipated that the thickness of the inner and intermediate layers can be modified to accomplish this end. In this embodiment, the interior layer 16 has a thickness between about 10% and about 20% of the thick outer layer. The interior layer has a thickness between about 0.15 mm and about 0.25 mm with a thickness of about 0.18 mm to about 0.22 mm being preferred. The intermediate bonding layer 14 is maintained at a thickness sufficient to permit sufficient laminar adhesion between the outer and interior layers. The intermediate bonding layer generally has a thickness less than that of the inner layer 16. The thickness of this layer is, preferably, between about 0.05 and about 0.1 mm.

The total wall thickness of the tubing of the present invention is generally between about 0.5 mm and about 2.0 mm with a wall thickness between about 0.8 and about 1.25 mm being preferred.

The tubing of the present invention may also, optionally include an outer jacket (not shown) which surrounds the outer layer. The fourth outer jacket may

-24-

be either co-extruded with the other layers during the extrusion process or may be put on in a subsequent process such as cross-extrusion. The outer jacket may be made of any material chosen for its structural or insulative characteristics and may be of any suitable wall thickness. Preferably, the outer jacket may be made of a thermoplastic material selected from the group consisting of zinc-chloride resistant Nylon 6, Nylon 11, Nylon 12, polypropylene, and thermoplastic elastomers such as SANTOPRENE, KRATON, VICHEM and SARLINK. If desired, these materials may be modified to include flame retardants, plasticizers and the like.

In the second embodiment, the outer jacket may, preferably, exhibit conductive characteristics in that it is capable of dissipation of electrostatic charge in the range of 10^{-4} to 10^{-9} ohm/cm². The material which composes the outer jacket may be inherently conductive in these ranges or, preferably, includes in its composition a conductive media in sufficient quantity to permit electrostatic dissipation in the range defined. The conductive media may be any suitable material of a composition and shape capable of effecting this static dissipation. The conductive material may be selected from the group consisting of elemental carbon, stainless steel and highly conductive metals such as copper, silver, gold, nickel, silicon and mixtures thereof. The term "elemental carbon" as used herein is employed to describe and include materials commonly referred to as "carbon black". The carbon black can be present in the form of carbon fibers, powders, spheres, and the like.

The amount of conductive material contained in the outer jacket is generally limited by considerations of low temperature durability and resistance to the degradative effects of the gasoline or fuel passing through the tubing. In the preferred embodiment, the thermoplastic material contains conductive material in an amount sufficient to effect electrostatic dissipation.

-25-

However, the maximum amount employed therein is preferably less than 5% by volume.

The conductive material can either be interstitially integrated into the crystalline structure of the polymer or can be co-polymerized therewith. Without being bound to any theory, it is believed that carbon-containing materials such as carbon black may be subject to carbon co-polymerization with the surrounding thermoplastic material. Material such as stainless steel are more likely to be interstitially integrated into the crystalline structure of the polymer.

-26-

What is claimed is:

1 1. A layered tubing for use in a motor
2 vehicle, the tubing comprising:
3 a thick flexible outer tubing having an inner
4 and an outer face, the outer tubing consisting
5 essentially of an extrudable thermoplastic having an
6 elongation value of at least 150% and an ability to
7 withstand impacts of at least 2 ft/lbs at temperatures
8 below about -20°C, wherein the extrudable thermoplastic
9 of the thick outer tubing is a melt-processible
10 thermoplastic selected from the group consisting of Nylon
11 11, Nylon 12, zinc chloride resistant Nylon 6,
12 Santoprene, Kraton, Vichem, Sarlink and mixtures thereof;
13 a thin intermediate bonding layer bonded to the
14 inner face of the thick outer tubing, the bonding layer
15 consisting essentially of an extrudable melt processible
16 thermoplastic resistant to permeation by short-chain
17 hydrocarbons, the bonding layer consisting of a
18 thermoplastic which is chemically dissimilar to the
19 extrudable thermoplastic employed in the outer tubing and
20 is capable of sufficiently permanent laminar adhesion to
21 the inner face of the thick outer tubing; and
22 an inner layer having a thickness less than the
23 thickness of the outer tubing bonded to the intermediate
24 bonding layer, the inner layer consisting of an
25 extrudable, melt-processible thermoplastic capable of
26 sufficiently permanent laminar adhesion with the
27 intermediate bonding layer having an elongation value of
28 at least 150% and an ability to withstand impacts of at
29 least 2 ft/lbs at temperatures below about -20°C.

1 2. The tubing of claim 1 wherein the outer
2 layer is composed of a thermoplastic consisting
3 essentially of an extrudable thermoplastic six-carbon
4 block polyamide.

-27-

1 3. The tubing of claim 2 wher in the inner
2 layer functions as a hydrocarbon barrier layer and is
3 composed of an extrudable, melt-processible thermoplastic
4 capable of sufficiently permanent laminar adhesion with
5 the intermediate bonding layer, the inner layer
6 consisting essentially of an extrudable thermoplastic
7 six-carbon block polyamide.

1 4. The tubing of claim 3 wherein the inner
2 layer is capable of dissipating electrostatic energy, the
3 electrostatic dissipation capacity being in a range
4 between about 10^{-4} to 10^{-9} ohm/cm².

1 5. The tubing of claim 3 wherein the inner
2 hydrocarbon layer contains quantities of a conductive
3 material sufficient to provide electrostatic dissipation
4 capability in a range between about 10^{-4} to 10^{-9} ohm/cm².

1 6. The tubing of claim 5 wherein the
2 conductive material is selected from the group consisting
3 of elemental carbon, copper, silver, gold, nickel,
4 silicon, and mixtures thereof.

1 7. The tubing of claim 6 wherein the
2 conductive material is present in an amount less than
3 about 5% by volume of the polymeric material.

1 8. The tubing of claim 2 wherein the
2 extrudable thermoplastic polyamide of the thick outer
3 layer is a derived by the condensation polymerization of
4 caprolactam.

1 9. The tubing of claim 8 wherein the
2 extrudable thermoplastic polyamide of the thick outer
3 layer consists essentially of Nylon 6 and additive
4 materials present in sufficient quantities to impart
5 resistance to exposure to zinc chloride.

-28-

1 10. The tubing of claim 8 wherein the thick
2 outer layer is essentially non-reactive after 200 hour
3 immersion in a 50% by weight aqueous zinc chloride
4 solution.

1 11. The tubing of claim 3 wherein the
2 thermoplastic material employed in the intermediate
3 bonding layer exhibits at least some resistance to
4 interaction with short-chain hydrocarbon molecules
5 present in material conveyed through the tubing.

1 12. The tubing of claim 11 wherein the
2 thermoplastic material employed in the intermediate
3 bonding layer includes as a major constituent an
4 extrudable, melt processible thermoplastic selected from
5 the group consisting of co-polymers of alkenes having
6 less than four carbon atoms and vinyl alcohol, copolymers
7 of alkenes having less than four carbon atoms and vinyl
8 acetate, and mixtures thereof.

1 13. The tubing of claim 1 further comprising
2 an exterior jacket overlying the thick outer tubing, the
3 exterior jacket composed of a material consisting
4 essentially of a thermoplastic rubber selected from the
5 group consisting of Nylon 11, Nylon 12, zinc chloride
6 resistant Nylon 6, Santoprene, Kraton, Vichem, Sarlink
7 and mixtures thereof.

1 14. The tubing of claim 1 wherein the
2 extrudable thermoplastic of the thick outer tubing is a
3 melt-processible thermoplastic selected from the group
4 consisting of Nylon 11, Nylon 12, zinc chloride resistant
5 Nylon 6, Santoprene, Kraton, Vichem, Sarlink and mixtures
6 thereof.

1 15. The tubing of claim 14 wherein the outer
2 tubing comprises:

-29-

3 an effective amount of a polyamide selected
4 from the group consisting of Nylon 11, Nylon 12, zinc
5 chloride resistant Nylon 6, and mixtures thereof; and
6 between about 1 and about 17% by volume of a
7 thermoplastic plasticizer material.

1 16. The tubing of claim 15 wherein the outer
2 layer is composed of Nylon 12.

1 17. The tubing of claim 16 wherein the
2 thermoplastic material employed in the intermediate
3 bonding layer exhibits at least some resistance to
4 interaction with short-chain hydrocarbon molecules
5 present in material conveyed through the tubing.

1 18. The tubing of claim 17 wherein the
2 thermoplastic material employed in the intermediate
3 bonding layer includes as a major constituent an
4 extrudable, melt processible thermoplastic is a
5 thermoplastic polyester selected from the group
6 consisting of polybutylene terephthalate, polyethylene
7 terephthalate, polyteremethylene terephthalate, and
8 mixtures thereof.

1 19. The tubing of claim 18 wherein the
2 thermoplastic material employed in the intermediate
3 bonding layer consists essentially of polybutylene
4 terephthalate.

1 20. The tubing of claim 18 wherein the
2 extrudable melt-processible thermoplastic of the inner
3 layer is selected from the group consisting of Nylon 11,
4 Nylon 12, zinc chloride-resistant Nylon 6, and mixtures
5 thereof.

1 21. The tubing of claim 20 wherein the inner
2 tubing comprises:

-30-

3 an effective amount of a polyamide selected
4 from the group consisting of Nylon 11, Nylon 12, Nylon 6,
5 and mixtures thereof; and
6 between about 1 and about 17% by volume of a
7 thermoplastic plasticizer material.

1 22. The tubing of claim 14 further comprising
2 an exterior jacket overlying the thick outer tubing, the
3 exterior jacket composed of a material consisting
4 essentially of a thermoplastic rubber selected from the
5 group consisting of Nylon 11, Nylon 12, zinc chloride
6 resistant Nylon 6, Santoprene, Kraton, Vichem, Sarlink,
7 and mixtures thereof.

1 23. The tubing of claim 22 wherein said outer
2 jacket is capable of dissipating electrostatic energy,
3 the electrostatic dissipation capacity being in a range
4 between about 10^{-4} to 10^{-9} ohm/cm².

1 24. The tubing of claim 22 wherein the outer
2 jacket contains quantities of a conductive material
3 sufficient to provide electrostatic dissipation
4 capability in a range between about 10^{-4} to 10^{-9} ohm/cm².

1 25. The tubing of claim 24 wherein the
2 conductive material is selected from the group consisting
3 of elemental carbon, copper, silver, gold, nickel,
4 silicon, and mixtures thereof.

1 26. A layered tubing for use in a motor
2 vehicle, the tubing being resistant to hydrocarbon
3 emissions, the tubing comprising:

4 an outer tubing having an inner and an outer
5 face, the outer tubing consisting essentially of an
6 extrudable melt processible six-carbon block polyamide
7 having an elongation value of at least 150% and an
8 ability to withstand impacts of at least 2 ft/lbs at

-31-

9 temperatures below about -20°C, the six-carbon block
10 polyamide being essentially non-reactive with zinc
11 chloride;
12 an intermediate bonding layer having a
13 thickness between about 0.01 mm and about 0.2 mm bonded
14 to the inner face of the thick outer layer, the bonding
15 layer consisting essentially of an extrudable
16 thermoplastic capable of sufficiently permanent laminar
17 adhesion to the polyamide outer tubing and exhibiting at
18 least some resistance to short-chain hydrocarbon
19 molecules conveyed through the tubing; and
20 an inner layer bonded to the intermediate
21 bonding layer having a thickness between about 0.01 mm
22 and about 0.2 mm, the inner layer consisting essentially
23 of an extrudable, melt processible thermoplastic capable
24 of sufficiently permanent laminar adhesion with the
25 intermediate bonding layer, the inner layer consisting
26 essentially of an extrudable thermoplastic six-carbon
27 block polyamide having an elongation value of at least
28 150% and an ability to withstand impacts of at least 2
29 ft/lbs at temperatures below about -20°C.

1 27. The tubing of claim 26 wherein the reduced
2 hydrocarbon emission rate is less than about 0.5g/m² per
3 24 hour interval.

1 28. The tubing of claim 26 further comprising
2 an exterior jacket overlying the thick outer tubing, the
3 exterior jacket composed of a material consisting
4 essentially of a thermoplastic rubber selected from the
5 group consisting of Nylon 11, Nylon 12, zinc chloride
6 resistant Nylon 6, Santoprene, Kraton, Vichem, Sarlink,
7 polypropylene and mixtures thereof.

1 29. A layered tubing for use in a motor
2 vehicle, the tubing comprising:

-32-

3 an outer tubing having an inner and an outer
4 face, the outer tubing consisting essentially of an
5 extrudable polyamide having an elongation value of at
6 least 150% and an ability to withstand impacts of at
7 least 2 ft/lbs at temperatures below about -20°C, wherein
8 the outer tubing comprises:

9 a) an effective amount of a polyamide selected
10 from the group consisting of Nylon 11, Nylon 12, Nylon 6,
11 and mixtures thereof; and

12 b) between about 1 and about 17% by volume of a
13 thermoplastic plasticizer material;

14 an intermediate bonding layer having a
15 thickness between about 0.05 mm and about 0.2 mm bonded
16 to the inner face of the thick outer tubing, the bonding
17 layer consisting essentially of an extrudable non-
18 polyamide thermoplastic capable of sufficiently permanent
19 laminar adhesion to the polyamide outer tubing and
20 exhibiting at least some resistance to short-chain
21 hydrocarbon molecules conveyed through the tubing,
22 wherein the extrudable thermoplastic of the intermediate
23 bonding layer is a thermoplastic polyester selected from
24 the group consisting of polybutylene terephthalate,
25 polyethylene terephthalate, polymethylene terephthalate,
26 and mixtures thereof; and

27 an inner layer bonded to the intermediate
28 bonding layer having a thickness between about 0.05 mm
29 and about 0.2 mm, the inner layer consisting essentially
30 of an extrudable, melt processible polyamide capable of
31 sufficiently permanent laminar adhesion with the
32 intermediate bonding layer selected from the group
33 consisting of Nylon 11, Nylon 12, zinc chloride resistant
34 Nylon 6, and mixtures thereof.

1 30. The tubing of claim 29 further comprising
2 an exterior jacket overlying the thick outer tubing, the
3 exterior jacket composed of a material consisting
4 essentially of a thermoplastic rubber selected from the

-33-

5 group consisting of Nylon 11, Nylon 12, zinc chloride
6 resistant Nylon 6, Santoprene, Kraton, Vichem, Sarlink,
7 polypropylene and mixtures thereof.

1 31. The tubing of claim 30 wherein said outer
2 jacket is capable of dissipating electrostatic energy,
3 the electrostatic dissipation capacity being in a range
4 between about 10^{-4} to 10^{-9} ohm/cm².

1 32. A layered tubing for use in a motor
2 vehicle, the tubing comprising:
3 a thick flexible outer tubing having a given
4 thickness and an inner and an outer face, the outer
5 tubing consisting essentially of an extrudable
6 thermoplastic having an elongation value of at least 150%
7 and an ability to withstand impacts of at least 2 ft/lbs
8 at temperatures below about -20°C;

9 an intermediate bonding layer bonded to the
10 inner face of the thick outer layer, the bonding layer
11 consisting essentially of an extrudable melt processible
12 thermoplastic capable of sufficiently permanent laminar
13 adhesion to the inner face of the outer tubing;

14 an interior layer bonded to the intermediate
15 bonding layer, the interior layer consisting essentially
16 of an extrudable, melt-processible thermoplastic material
17 capable of sufficiently permanent laminar adhesion with
18 the intermediate bonding layer, the melt-processible
19 thermoplastic which is chemically dissimilar to the
20 thermoplastic employed in the thick outer layer, the
21 chemically dissimilar thermoplastic being resistant to
22 permeation by and interaction with short-chain aliphatic
23 and aromatic hydrocarbon compounds; and

24 an innermost electrostatic dissipation layer
25 integrally bonded to the multi-layer tubing, the
26 electrostatic dissipation layer consisting of an
27 extrudable, melt-processible thermoplastic material
28 capable of sufficiently permanent laminar adhesion with

-34-

29 the intermediate bonding layer and of dissipating
30 electrostatic energy, the electrostatic dissipation
31 capacity being in a range between about 10^{-4} to 10^{-9}
32 ohm/cm².

1 33. The multi-layer tubing of claim 32 wherein
2 the interior layer is a thermoplastic material consisting
3 essentially of a fluoroplastic material selected from the
4 group consisting of polyvinylidene fluoride, polyvinyl
5 fluoride, and mixtures thereof.

1 34. The multi-layer tubing of claim 33 wherein
2 the fluoroplastic material further consists of copolymers
3 of vinylidene difluoride and chlorotrifluoroethane
4 copolymerized with polyvinylidene fluoride, copolymers of
5 vinylidene difluoride and chlorotrifluoroethane
6 copolymerized with polyvinyl fluoride, and mixtures
7 thereof.

1 35. The multi-layer tubing of claim 34 wherein
2 the interior layer has a thickness between about 10% and
3 about 20% of the thick outer layer.

1 36. The multi-layer tubing of claim 35 wherein
2 the innermost electrostatic discharge layer consists of a
3 thermoplastic material which is chemically dissimilar to
4 the thick outer layer.

1 37. The multi-layer tubing of claim 36 wherein
2 the innermost electrostatic discharge layer consists
3 essentially of a thermoplastic material which consists
4 essentially of a fluoroplastic selected from the group
5 consisting of polyvinylidene fluoride, polyvinyl
6 fluoride, and mixtures thereof.

1 38. The multi-layer tubing of claim 37 wherein
2 the fluoroplastic material further comprises copolymers

-35-

3 of vinylidene difluoride and chlorotrifluoroethane
4 copolymerized with polyvinylidene fluoride, copolymers of
5 vinylidene difluoride and chlorotrifluoroethane
6 copolymerized with polyvinyl fluoride, and mixtures
7 thereof.

1 39. The multi-layer tubing of claim 38 wherein
2 the innermost electrostatic barrier layer has a thickness
3 between about 0.1% and about 0.2% of the thick outer
4 layer.

1 40. The multi-layer tubing of claim 39 wherein
2 the innermost electrostatic dissipation layer contains
3 quantities of a conductive material sufficient to provide
4 electrostatic dissipation capability in a range between
5 about 10^{-4} to 10^{-9} ohm/cm².

1 41. The tubing of claim 40 wherein the
2 conductive material is selected from the group consisting
3 of elemental carbon, copper, silver, gold, nickel,
4 silicon, and mixtures thereof.

1 42. The tubing of claim 41 wherein the
2 conductive material is present in an amount less than
3 about 5% by volume of the polymeric material.

1 43. The multi-layer tubing of claim 42 wherein
2 the bonding layer is a thermoplastic material consisting
3 essentially of:

4 a fluoroplastic material selected from the
5 group consisting of ethylene dichlorotrifluoroethylene,
6 and mixtures thereof; and

7 a graft copolymer selected from the group
8 consisting of copolymers of vinylidene difluoride and
9 chlorotrifluoroethylene copolymerized with polyvinylidene
10 difluoride, copolymers of vinylidene difluoride and

-36-

11 chlorotrifluoroethylene copolymerized with ethylene
12 dichlorotrifluoroethylene, and mixtures thereof.

1 44. The tubing of claim 43 wherein the
2 conductive material is elemental carbon and is
3 copolymerized with the extrudable fluoroplastic material.

1 45. The tubing of claim 32 wherein the
2 extrudable thermoplastic of the thick outer tubing is a
3 polyamide selected from the group consisting of Nylon 11,
4 Nylon 12, zinc chloride resistant Nylon 6, Santoprene,
5 Kraton, Vichem, Sarlink and mixtures thereof.

1 46. The tubing of claim 32 further comprising
2 an exterior jacket overlying the thick outer tubing, the
3 exterior jacket composed of a material consisting
4 essentially of a thermoplastic rubber selected from the
5 group consisting of Nylon 11, Nylon 12, zinc chloride
6 resistant Nylon 6, Santoprene, Kraton, Vichem, Sarlink
7 and mixtures thereof.

1 47. A layered tubing for use in a motor
2 vehicle, the tubing comprising:
3 a thick flexible outer tubing having a given
4 thickness and an inner and an outer face, the outer
5 tubing consisting essentially of an extrudable polyamide
6 having an elongation value of at least 150% and an
7 ability to withstand impacts of at least 2 ft/lbs at
8 temperatures below about -20°C;

9 an intermediate bonding layer having a
10 thickness between about 0.05 mm and about 0.1 mm bonded
11 to the inner face of the thick outer layer, the bonding
12 layer consisting essentially of an extrudable
13 thermoplastic capable of sufficiently permanent laminar
14 adhesion to the polyamide outer tubing;

15 an interior layer bonded to the intermediate
16 bonding layer, the interior layer having a thickness

-37-

17 between about 0.05 mm and about 0.15 mm and consisting
18 essentially of an extrudable, melt-processible
19 thermoplastic material capable of sufficiently permanent
20 laminar adhesion with the intermediate bonding layer, the
21 melt-processible thermoplastic resistant to permeation by
22 and interaction with short-chain aliphatic and aromatic
23 hydrocarbon compounds selected from the group consisting
24 of polyvinylidene fluoride, polyvinyl fluoride,
25 copolymers of vinylidene difluoride and
26 chlorotrifluoroethane copolymerized with polyvinylidene
27 fluoride, copolymers of vinylidene difluoride and
28 chlorotrifluoroethane copolymerized with polyvinyl
29 fluoride, and mixtures thereof; and
30 an innermost electrostatic dissipation layer
31 integrally bonded to the multi-layer tubing, the
32 electrostatic discharge layer having a thickness between
33 about 0.1 mm and about 0.2 mm and consisting essentially
34 of an extrudable, melt-processible thermoplastic material
35 capable of sufficiently permanent laminar adhesion with
36 the intermediate bonding layer and of dissipating
37 electrostatic energy, the electrostatic dissipation
38 capacity being in a range between about 10^{-4} to 10^{-9}
39 ohm/cm², the innermost electrostatic dissipation layer
40 selected from the group consisting of a fluoroplastic
41 selected from the group consisting of polyvinylidene
42 fluoride, polyvinyl fluoride, copolymers of vinylidene
43 difluoride and chlorotrifluoroethane copolymerized with
44 polyvinylidene fluoride, copolymers of vinylidene
45 difluoride and chlorotrifluoroethane copolymerized with
46 polyvinyl fluoride, wherein the thermoplastic material of
47 the innermost hydrocarbon barrier layer is capable of
48 dissipating electrostatic energy, the electrostatic
49 dissipation capacity being in a range between about 10^{-4}
50 to 10^{-9} ohm/cm².

AMENDED CLAIMS

[received by the International Bureau on 9 December 1993 (09.12.93);
original claims 1, 13, 15, 21, 22, 26, 28-30, 32, 45 and 47 amended;
original claims 2 and 14 cancelled; remaining claims unchanged (15 pages)]

- 1 1. A layered tubing for use in a motor vehicle,
2 the tubing comprising:
3 a thick flexible outer layer having an inner and
4 an outer face, the outer layer consisting essentially of an
5 extrudable thermoplastic having an elongation value of at
6 least 150% and an ability to withstand impacts of at least
7 2 ft/lbs at temperatures below about -20°C, wherein the
8 extrudable thermoplastic of the thick outer layer is an
9 extrudable melt-processible zinc chloride-resistant six-
10 carbon block polyamide;
11 a thin intermediate bonding layer bonded to the
12 inner face of the thick outer layer, the bonding layer
13 consisting essentially of an extrudable melt processible
14 thermoplastic resistant to permeation by short-chain
15 hydrocarbons, the bonding layer consisting of a
16 thermoplastic which is chemically dissimilar to the
17 extrudable thermoplastic employed in the outer layer and is
18 capable of sufficiently permanent laminar adhesion to the
19 inner face of the thick outer layer; and
20 an inner layer having a thickness less than the
21 thickness of the outer layer bonded to the intermediate
22 bonding layer, the inner layer consisting of an extrudable,
23 melt-processible thermoplastic capable of sufficiently
24 permanent laminar adhesion with the intermediate bonding
25 layer having an elongation value of at least 150% and an
26 ability to withstand impacts of at least 2 ft/lbs at
27 temperatures below about -20°C.

Cancel Claim 2

1 3. The tubing of claim 2 wherein the inner
2 layer functions as a hydrocarbon barrier layer and is
3 composed of an extrudable, melt-processible thermoplastic
4 capable of sufficiently permanent laminar adhesion with
5 the intermediate bonding layer, the inner layer
6 consisting essentially of an extrudable thermoplastic
7 six-carbon block polyamide.

1 4. The tubing of claim 3 wherein the inner
2 layer is capable of dissipating electrostatic energy, the
3 electrostatic dissipation capacity being in a range
4 between about 10^{-4} to 10^{-9} ohm/cm².

1 5. The tubing of claim 3 wherein the inner
2 hydrocarbon layer contains quantities of a conductive
3 material sufficient to provide electrostatic dissipation
4 capability in a range between about 10^{-4} to 10^{-9} ohm/cm².

1 6. The tubing of claim 5 wherein the
2 conductive material is selected from the group consisting
3 of elemental carbon, copper, silver, gold, nickel,
4 silicon, and mixtures thereof.

1 7. The tubing of claim 6 wherein the
2 conductive material is present in an amount less than
3 about 5% by volume of the polymeric material.

1 8. The tubing of claim 2 wherein the
2 extrudable thermoplastic polyamide of the thick outer
3 layer is derived by the condensation polymerization of
4 caprolactam.

1 9. The tubing of claim 8 wherein the
2 extrudable thermoplastic polyamide of the thick outer
3 layer consists essentially of Nylon 6 and additive
4 materials present in sufficient quantities to impart
5 resistance to exposure to zinc chloride.

1 10. The tubing of claim 8 wherein the thick
2 outer layer is essentially non-reactive after 200 hour
3 immersion in a 50% by weight aqueous zinc chloride
4 solution.

1 11. The tubing of claim 3 wherein the
2 thermoplastic material employed in the intermediate bonding
3 layer exhibits at least some resistance to interaction with
4 short-chain hydrocarbon molecules present in material
5 conveyed through the tubing.

1 12. The tubing of claim 11 wherein the
2 thermoplastic material employed in the intermediate bonding
3 layer includes as a major constituent an extrudable, melt
4 processible thermoplastic selected from the group
5 consisting of co-polymers of alkenes having less than four
6 carbon atoms and vinyl alcohol, copolymers of alkenes
7 having less than four carbon atoms and vinyl acetate, and
8 mixtures thereof.

1 13. A layered tubing for use in a motor vehicle,
2 the tubing comprising:
3 a thick flexible outer layer having an inner and
4 an outer face, the outer layer consisting essentially of an
5 extrudable thermoplastic having an elongation value of at
6 least 150% and an ability to withstand impacts of at least
7 2 ft/lbs at temperatures below about -20°C, wherein the
8 extrudable thermoplastic of the thick outer layer is a
9 melt-processible thermoplastic selected from the group
10 consisting of Nylon 11, Nylon 12, zinc chloride resistant
11 Nylon 6, Santoprene, Kraton, Vichem, Sarlink and mixtures
12 thereof;

13 a thin intermediate bonding layer bonded to the
14 inner face of the thick outer layer, the bonding layer
15 consisting essentially of an extrudable melt processible
16 thermoplastic resistant to permeation by short-chain
17 hydrocarbons, the bonding layer consisting of a

18 thermoplastic which is chemically dissimilar to the
19 extrudable thermoplastic employed in the outer layer and is
20 capable of sufficiently permanent laminar adhesion to the
21 inner face of the thick outer layer;

22 an inner layer having a thickness less than the
23 thickness of the outer layer bonded to the intermediate
24 bonding layer, the inner layer consisting of an extrudable,
25 melt-processible thermoplastic capable of sufficiently
26 permanent laminar adhesion with the intermediate bonding
27 layer having an elongation value of at least 150% and an
28 ability to withstand impacts of at least 2 ft/lbs at
29 temperatures below about -20°C; and

30 an exterior jacket overlying the thick outer
31 tubing, the exterior jacket composed of a material
32 consisting essentially of a thermoplastic rubber selected
33 from the group consisting of Nylon 11, Nylon 12, zinc
34 chloride resistant Nylon 6, Santoprene, Kraton, Vichem,
35 Sarlink and mixtures thereof.

Cancel Claim 14

1 15. A layered tubing for use in a motor vehicle,
2 the tubing comprising:

3 a thick flexible outer layer having an inner and
4 an outer face, the outer layer consisting essentially of an
5 extrudable thermoplastic having an elongation value of at
6 least 150% and an ability to withstand impacts of at least
7 2 ft/lbs at temperatures below about -20°C, wherein the
8 thick outer layer is a melt-processible extrudable
9 thermoplastic comprising:

10 (a) an effective amount of a polyamide selected
11 from the group consisting of Nylon 11, Nylon 12, zinc
12 chloride resistant Nylon 6, and mixtures thereof; and

13 (b) between about 1 and about 17% by volume of a
14 thermoplastic plasticizer material;

15 a thin intermediate bonding layer bonded to the
16 inner face of the thick outer layer, the bonding layer
17 consisting essentially of an extrudable melt processible

18 thermoplastic resistant to permeation by short-chain
19 hydrocarbons, the bonding layer consisting of a
20 thermoplastic which is chemically dissimilar to the
21 extrudable thermoplastic employed in the outer layer and is
22 capable of sufficiently permanent laminar adhesion to the
23 inner face of the thick outer layer; and
24 an inner layer having a thickness less than the
25 thickness of the outer layer bonded to the intermediate
26 bonding layer, the inner layer consisting of an extrudable,
27 melt-processible thermoplastic capable of sufficiently
28 permanent laminar adhesion with the intermediate bonding
29 layer having an elongation value of at least 150% and an
30 ability to withstand impacts of at least 2 ft/lbs at
31 temperatures below about -20°C.

1 16. The tubing of claim 15 wherein the outer
2 layer is composed of Nylon 12.

1 17. The tubing of claim 16 wherein the
2 thermoplastic material employed in the intermediate bonding
3 layer exhibits at least some resistance to interaction with
4 short-chain hydrocarbon molecules present in material
5 conveyed through the tubing.

1 18. The tubing of claim 17 wherein the
2 thermoplastic material employed in the intermediate bonding
3 layer includes as a major constituent an extrudable, melt
4 processible thermoplastic is a thermoplastic polyester
5 selected from the group consisting of polybutylene
6 terephthalate, polyethylene terephthalate, polyteremethylene
7 terephthalate, and mixtures thereof.

1 19. The tubing of claim 18 wherein the
2 thermoplastic material employed in the intermediate bonding
3 layer consists essentially of polybutylene terephthalate.

1 20. The tubing of claim 18 wherein the
2 extrudable melt-processible thermoplastic of the inner
3 layer is selected from the group consisting of Nylon 11,
4 Nylon 12, zinc chloride-resistant Nylon 6, and mixtures
5 thereof.

1 21. The tubing of claim 20 wherein the inner
2 layer comprises:

3 an effective amount of a polyamide selected from
4 the group consisting of Nylon 11, Nylon 12, Nylon 6, and
5 mixtures thereof; and
6 between about 1 and about 17% by volume of a
7 thermoplastic plasticizer material.

1 22. A layered tubing for use in a motor vehicle,
2 the tubing comprising:

3 a thick flexible outer layer having an inner and
4 an outer face, the outer layer consisting essentially of an
5 extrudable thermoplastic having an elongation value of at
6 least 150% and an ability to withstand impacts of at least
7 2 ft/lbs at temperatures below about -20°C, wherein the
8 extrudable thermoplastic of the thick outer layer is a
9 melt-processible thermoplastic selected from the group
10 consisting of Nylon 11, Nylon 12, zinc chloride resistant
11 Nylon 6, Santoprene, Kraton, Vichem, Sarlink and mixtures
12 thereof;

13 a thin intermediate bonding layer bonded to the
14 inner face of the thick outer layer, the bonding layer
15 consisting essentially of an extrudable melt processible
16 thermoplastic resistant to permeation by short-chain
17 hydrocarbons, the bonding layer consisting of a
18 thermoplastic which is chemically dissimilar to the
19 extrudable thermoplastic employed in the outer layer and is
20 capable of sufficiently permanent laminar adhesion to the
21 inner face of the thick outer layer;

22 an inner layer having a thickness less than the
23 thickness of the outer layer bonded to the intermediate
24 bonding layer, the inner layer consisting of an extrudable,
25 melt-processible thermoplastic capable of sufficiently
26 permanent laminar adhesion with the intermediate bonding
27 layer having an elongation value of at least 150% and an
28 ability to withstand impacts of at least 2 ft/lbs at
29 temperatures below about -20°C; and

30 an exterior jacket overlying the thick outer
31 layer, the exterior jacket composed of a material

32 consisting essentially of a thermoplastic rubber selected
33 from the group consisting of Nylon 11, Nylon 12, zinc
34 chloride resistant Nylon 6, Santoprene, Kraton, Vichem,
35 Sarlink, and mixtures thereof.

1 23. The tubing of claim 22 wherein said outer
2 jacket is capable of dissipating electrostatic energy, the
3 electrostatic dissipation capacity being in a range between
4 about 10^{-4} to 10^{-9} ohm/cm².

1 24. The tubing of claim 22 wherein the outer
2 jacket contains quantities of a conductive material
3 sufficient to provide electrostatic dissipation capability
4 in a range between about 10^{-4} to 10^{-9} ohm/cm².

1 25. The tubing of claim 24 wherein the
2 conductive material is selected from the group consisting
3 of elemental carbon, copper, silver, gold, nickel, silicon,
4 and mixtures thereof.

1 26. A layered tubing for use in a motor vehicle,
2 the tubing being resistant to hydrocarbon emissions, the
3 tubing comprising:

4 an outer layer having an inner and an outer face,
5 the outer layer consisting essentially of an extrudable
6 melt processible six-carbon block polyamide having an
7 elongation value of at least 150% and an ability to
8 withstand impacts of at least 2 ft/lbs at

9 temperatures below about -20°C , the six-carbon block
10 polyamide being essentially non-reactive with zinc
11 chloride;

12 an intermediate bonding layer having a thickness
13 between about 0.01 mm and about 0.2 mm bonded to the inner
14 face of the thick outer layer, the bonding layer consisting
15 essentially of an extrudable thermoplastic capable of
16 sufficiently permanent laminar adhesion to the polyamide
17 outer layer and exhibiting at least some resistance to
18 short-chain hydrocarbon molecules conveyed through the
19 tubing; and

20 an inner layer bonded to the intermediate bonding
21 layer having a thickness between about 0.01 mm and about
22 0.2 mm, the inner layer consisting essentially of an
23 extrudable, melt processible thermoplastic capable of
24 sufficiently permanent laminar adhesion with the
25 intermediate bonding layer, the inner layer consisting
26 essentially of an extrudable thermoplastic six-carbon block
27 polyamide having an elongation value of at least 150% and
28 an ability to withstand impacts of at least 2 ft/lbs at
29 temperatures below about -20°C .

1 27. The tubing of claim 26 wherein the reduced
2 hydrocarbon emission rate is less than about $0.5\text{g}/\text{m}^2$ per 24
3 hour interval.

1 28. The tubing of claim 26 further comprising an
2 exterior jacket overlying the thick outer layer, the
3 exterior jacket composed of a material consisting
4 essentially of a thermoplastic rubber selected from the
5 group consisting of Nylon 11, Nylon 12, zinc chloride
6 resistant Nylon 6, Santoprene, Kraton, Vichem, Sarlink,
7 polypropylene and mixtures thereof.

1 29. A layered tubing for use in a motor vehicle,
2 the tubing comprising:

3 an outer layer having an inner and an outer face,
4 the outer layer consisting essentially of an extrudable
5 polyamide having an elongation value of at least 150% and
6 an ability to withstand impacts of at least 2 ft/lbs at
7 temperatures below about -20°C, wherein the outer tubing
8 comprises:

9 a) an effective amount of a polyamide selected
10 from the group consisting of Nylon 11, Nylon 12, Nylon 6,
11 and mixtures thereof; and

12 b) between about 1 and about 17% by volume of a
13 thermoplastic plasticizer material;

14 an intermediate bonding layer having a thickness
15 between about 0.05 mm and about 0.2 mm bonded to the inner
16 face of the thick outer layer, the bonding layer consisting
17 essentially of an extrudable non-polyamide thermoplastic
18 capable of sufficiently permanent laminar adhesion to the
19 polyamide outer layer and exhibiting at least some
20 resistance to short-chain hydrocarbon molecules conveyed
21 through the layer, wherein the extrudable thermoplastic of
22 the intermediate bonding layer is a thermoplastic polyester
23 selected from the group consisting of polybutylene
24 terephthalate, polyethylene terephthalate, polymethylene
25 terephthalate, and mixtures thereof; and

26 an inner layer bonded to the intermediate bonding
27 layer having a thickness between about 0.05 mm and about
28 0.2 mm, the inner layer consisting essentially of an
29 extrudable, melt processible polyamide capable of
30 sufficiently permanent laminar adhesion with the
31 intermediate bonding layer selected from the group
32 consisting of Nylon 11, Nylon 12, zinc chloride resistant
33 Nylon 6, and mixtures thereof.

1 30. The tubing of claim 29 further comprising an
2 exterior jacket overlying the thick outer layer, the
3 exterior jacket composed of a material consisting
4 essentially of a thermoplastic rubber selected from the

5 group consisting of Nylon 11, Nylon 12, zinc chloride
6 resistant Nylon 6, Santoprene, Kraton, Vichem, Sarlink,
7 polypropylene and mixtures thereof.

1 31. The tubing of claim 30 wherein said outer
2 jacket is capable of dissipating electrostatic energy, the
3 electrostatic dissipation capacity being in a range between
4 about 10^{-4} to 10^{-9} ohm/cm².

1 32. A layered tubing for use in a motor vehicle,
2 the tubing comprising:

3 a thick flexible outer layer having a given
4 thickness and an inner and an outer face, the outer layer
5 consisting essentially of an extrudable thermoplastic
6 having an elongation value of at least 150% and an ability
7 to withstand impacts of at least 2 ft/lbs at temperatures
8 below about -20°C;

9 an intermediate bonding layer bonded to the inner
10 face of the thick outer layer, the bonding layer consisting
11 essentially of an extrudable melt processible thermoplastic
12 capable of sufficiently permanent laminar adhesion to the
13 inner face of the outer layer;

14 an interior layer bonded to the intermediate
15 bonding layer, the interior layer consisting essentially of
16 an extrudable, melt-processible thermoplastic material
17 capable of sufficiently permanent laminar adhesion with the
18 intermediate bonding layer, the melt-processible
19 thermoplastic which is chemically dissimilar to the
20 thermoplastic employed in the thick outer layer, the
21 chemically dissimilar thermoplastic being resistant to
22 permeation by and interaction with short-chain aliphatic
23 and aromatic hydrocarbon compounds; and

24 an innermost electrostatic dissipation layer
25 integrally bonded to the multi-layer tubing, the
26 electrostatic dissipation layer consisting of an
27 extrudable, melt-processible thermoplastic material capable
28 of sufficiently permanent laminar adhesion with

29 the intermediate bonding layer and of dissipating
30 electrostatic energy, the electrostatic dissipation
31 capacity being in a range between about 10^{-4} to 10^{-9}
32 ohm/cm².

1 33. The multi-layer tubing of claim 32 wherein
2 the interior layer is a thermoplastic material consisting
3 essentially of a fluoroplastic material selected from the
4 group consisting of polyvinylidene fluoride, polyvinyl
5 fluoride, and mixtures thereof.

1 34. The multi-layer tubing of claim 33 wherein
2 the fluoroplastic material further consists of copolymers
3 of vinylidene difluoride and chlorotrifluoroethane
4 copolymerized with polyvinylidene fluoride, copolymers of
5 vinylidene difluoride and chlorotrifluoroethane
6 copolymerized with polyvinyl fluoride, and mixtures
7 thereof.

1 35. The multi-layer tubing of claim 34 wherein
2 the interior layer has a thickness between about 10% and
3 about 20% of the thick outer layer.

1 36. The multi-layer tubing of claim 35 wherein
2 the innermost electrostatic discharge layer consists of a
3 thermoplastic material which is chemically dissimilar to
4 the thick outer layer.

1 37. The multi-layer tubing of claim 36 wherein
2 the innermost electrostatic discharge layer consists
3 essentially of a thermoplastic material which consists
4 essentially of a fluoroplastic selected from the group
5 consisting of polyvinylidene fluoride, polyvinyl
6 fluoride, and mixtures thereof.

1 38. The multi-layer tubing of claim 37 wherein
2 the fluoroplastic material further comprises copolymers

3 of vinylidene difluoride and chlorotrifluoroethane
4 copolymerized with polyvinylidene fluoride, copolymers of
5 vinylidene difluoride and chlorotrifluoroethane
6 copolymerized with polyvinyl fluoride, and mixtures
7 thereof.

1 39. The multi-layer tubing of claim 38 wherein
2 the innermost electrostatic barrier layer has a thickness
3 between about 0.1% and about 0.2% of the thick outer
4 layer.

1 40. The multi-layer tubing of claim 39 wherein
2 the innermost electrostatic dissipation layer contains
3 quantities of a conductive material sufficient to provide
4 electrostatic dissipation capability in a range between
5 about 10^{-4} to 10^{-9} ohm/cm².

1 41. The tubing of claim 40 wherein the
2 conductive material is selected from the group consisting
3 of elemental carbon, copper, silver, gold, nickel,
4 silicon, and mixtures thereof.

1 42. The tubing of claim 41 wherein the
2 conductive material is present in an amount less than
3 about 5% by volume of the polymeric material.

1 43. The multi-layer tubing of claim 42 wherein
2 the bonding layer is a thermoplastic material consisting
3 essentially of:
4 a fluoroplastic material selected from the
5 group consisting of ethylene dichlorotrifluoroethylene,
6 and mixtures thereof; and
7 a graft copolymer selected from the group
8 consisting of copolymers of vinylidene difluoride and
9 chlorotrifluoroethylene copolymerized with polyvinylidene
10 difluoride, copolymers of vinylidene difluoride and

11 chlorotrifluoroethylene copolymerized with ethylene
12 dichlorotrifluoroethylene, and mixtures thereof.

1 44. The tubing of claim 43 wherein the
2 conductive material is elemental carbon and is
3 copolymerized with the extrudable fluoroplastic material.

1 45. The tubing of claim 32 wherein the
2 extrudable thermoplastic of the thick outer layer is a
3 polyamide selected from the group consisting of Nylon 11,
4 Nylon 12, zinc chloride resistant Nylon 6, Santoprene,
5 Kraton, Vichem, Sarlink and mixtures thereof.

1 46. The tubing of claim 32 further comprising an
2 exterior jacket overlying the thick outer tubing, the
3 exterior jacket composed of a material consisting
4 essentially of a thermoplastic rubber selected from the
5 group consisting of Nylon 11, Nylon 12, zinc chloride
6 resistant Nylon 6, Santoprene, Kraton, Vichem, Sarlink and
7 mixtures thereof.

1 47. A layered tubing for use in a motor vehicle,
2 the tubing comprising:

3 a thick flexible outer layer having a given
4 thickness and an inner and an outer face, the outer layer
5 consisting essentially of an extrudable polyamide having an
6 elongation value of at least 150% and an ability to
7 withstand impacts of at least 2 ft/lbs at temperatures
8 below about -20°C;

9 an intermediate bonding layer having a thickness
10 between about 0.05 mm and about 0.1 mm bonded to the inner
11 face of the thick outer layer, the bonding layer consisting
12 essentially of an extrudable thermoplastic capable of
13 sufficiently permanent laminar adhesion to the polyamide
14 outer layer;

15 an interior layer bonded to the intermediate
16 bonding layer, the interior layer having a thickness

17 between about 0.05 mm and about 0.15 mm and consisting
18 essentially of an extrudable, melt-processible
19 thermoplastic material capable of sufficiently permanent
20 laminar adhesion with the intermediate bonding layer, the
21 melt-processible thermoplastic resistant to permeation by
22 and interaction with short-chain aliphatic and aromatic
23 hydrocarbon compounds selected from the group consisting
24 of polyvinylidene fluoride, polyvinyl fluoride,
25 copolymers of vinylidene difluoride and
26 chlorotrifluoroethane copolymerized with polyvinylidene
27 fluoride, copolymers of vinylidene difluoride and
28 chlorotrifluoroethane copolymerized with polyvinyl
29 fluoride, and mixtures thereof; and
30 an innermost electrostatic dissipation layer
31 integrally bonded to the multi-layer tubing, the
32 electrostatic discharge layer having a thickness between
33 about 0.1 mm and about 0.2 mm and consisting essentially
34 of an extrudable, melt-processible thermoplastic material
35 capable of sufficiently permanent laminar adhesion with
36 the intermediate bonding layer and of dissipating
37 electrostatic energy, the electrostatic dissipation
38 capacity being in a range between about 10^{-4} to 10^{-9}
39 ohm/cm², the innermost electrostatic dissipation layer
40 selected from the group consisting of a fluoroplastic
41 selected from the group consisting of polyvinylidene
42 fluoride, polyvinyl fluoride, copolymers of vinylidene
43 difluoride and chlorotrifluoroethane copolymerized with
44 polyvinylidene fluoride, copolymers of vinylidene
45 difluoride and chlorotrifluoroethane copolymerized with
46 polyvinyl fluoride, wherein the thermoplastic material of
47 the innermost hydrocarbon barrier layer is capable of
48 dissipating electrostatic energy, the electrostatic
49 dissipation capacity being in a range between about 10^{-4}
50 to 10^{-9} ohm/cm².

STATEMENT UNDER ARTICLE 19(1)

The Amendments to Claims 1, 13, 15, 21, 22, 26, 28, 29, 30, 32, 45 and 47 submitted herewith are to more specifically set forth the features of Applicant's invention. Such amendments generally add the subject matter of certain dependent claims to said claims to specifically describe the features of Applicant's invention and/or amend claim language to clarify the claim as amended. Claims 2 and 14 have been cancelled.

1/2

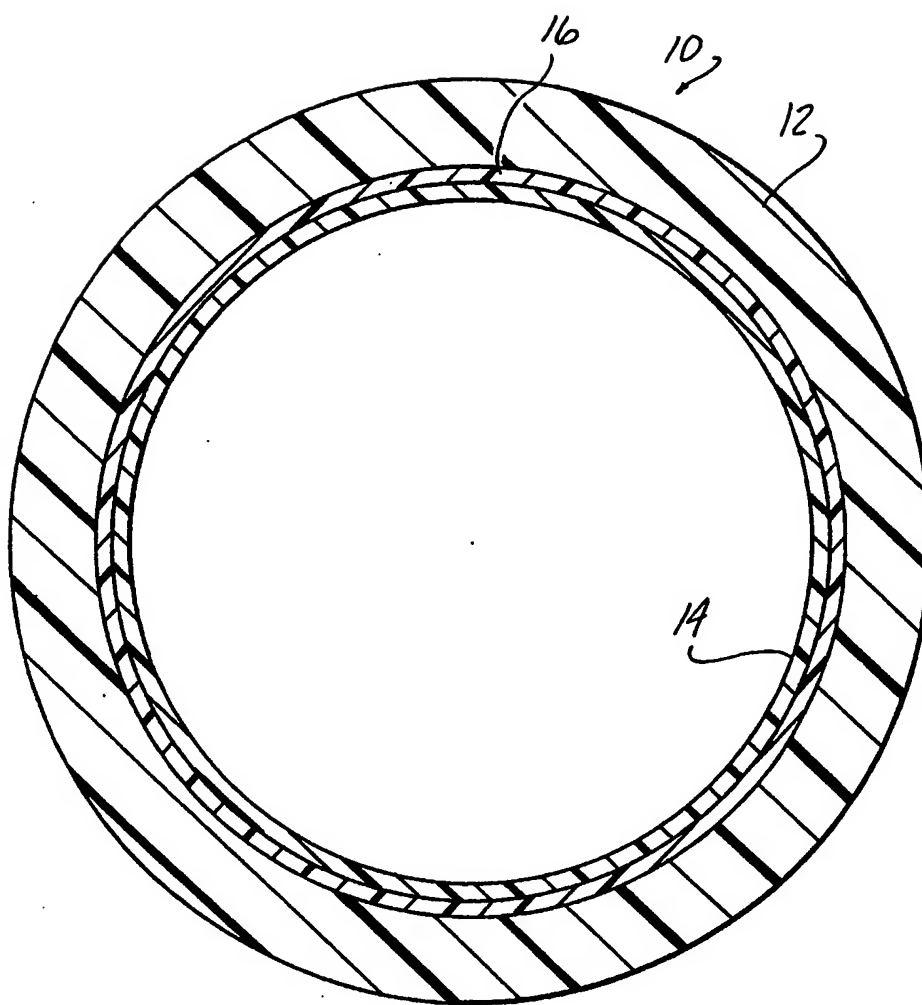


FIG-1

SUBSTITUTE SHEET

2/2

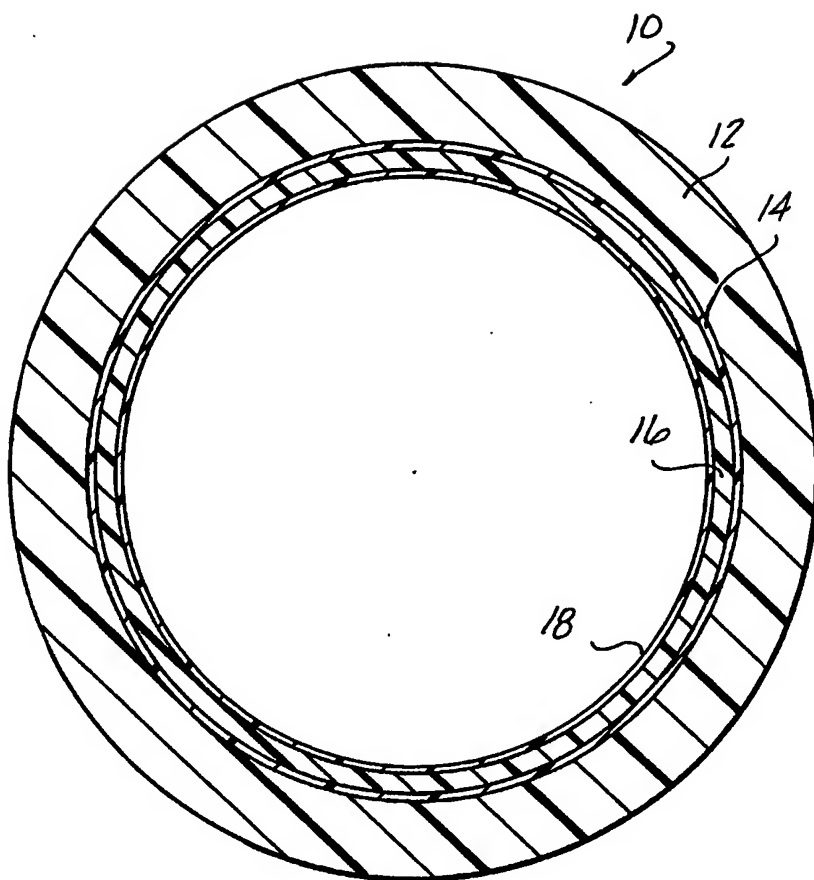


FIG-2

PCT/US 93/05531

I. CLASSIFICATION F SUBJECT MATTER (If several classification symbols apply, indicate all) ⁶ According to International Patent Classification (IPC) or to both National Classification and IPC Int.Cl. 5 F16L9/12; F16L11/127																	
II. FIELDS SEARCHED <div style="text-align: center; border: 1px solid black; padding: 2px;">Minimum Documentation Searched⁷</div> <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 20%; border: 1px solid black; padding: 5px;">Classification System</th> <th style="border: 1px solid black; padding: 5px;">Classification Symbols</th> </tr> <tr> <td style="border: 1px solid black; padding: 5px;">Int.Cl. 5</td> <td style="border: 1px solid black; padding: 5px;">F16L</td> </tr> </table> <div style="text-align: center; padding: 5px;"> Documentation Searched other than Minimum Documentation to the Extent that such Documents are included in the Fields Searched⁸ </div>			Classification System	Classification Symbols	Int.Cl. 5	F16L											
Classification System	Classification Symbols																
Int.Cl. 5	F16L																
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹ <table style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 10%; border: 1px solid black; padding: 5px;">Category *</th> <th style="border: 1px solid black; padding: 5px;">Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²</th> <th style="width: 10%; border: 1px solid black; padding: 5px;">Relevant to Claims No.¹³</th> </tr> <tr> <td style="border: 1px solid black; text-align: center; vertical-align: top; padding: 5px;">X</td> <td style="border: 1px solid black; padding: 5px;">DE,C,3 827 092 (TECHNOFORM CAPRANO ET AL.) 7 September 1989 see the whole document</td> <td style="border: 1px solid black; text-align: center; vertical-align: top; padding: 5px;">1</td> </tr> <tr> <td style="border: 1px solid black; text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="border: 1px solid black; padding: 5px;"> <div style="text-align: center;">---</div> US,A,5 076 329 (BRUNNNHOFFER) 31 December 1991 cited in the application see the whole document </td> <td style="border: 1px solid black; text-align: center; vertical-align: top; padding: 5px;"> 2,3,11, 12,14, 26,32,47 </td> </tr> <tr> <td style="border: 1px solid black; text-align: center; vertical-align: top; padding: 5px;">A</td> <td style="border: 1px solid black; padding: 5px;"> <div style="text-align: center;">---</div> US,A,5 038 833 (BRUNNNHOFFER) 13 August 1991 cited in the application see claims 1-13 </td> <td style="border: 1px solid black; text-align: center; vertical-align: top; padding: 5px;"> 1,14-17, 26,29, 32,45,47 </td> </tr> <tr> <td colspan="2" style="border: 1px solid black; text-align: center; padding: 5px;">---</td> <td style="border: 1px solid black; text-align: center; padding: 5px;">-/--</td> </tr> </table>			Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claims No. ¹³	X	DE,C,3 827 092 (TECHNOFORM CAPRANO ET AL.) 7 September 1989 see the whole document	1	A	<div style="text-align: center;">---</div> US,A,5 076 329 (BRUNNNHOFFER) 31 December 1991 cited in the application see the whole document	2,3,11, 12,14, 26,32,47	A	<div style="text-align: center;">---</div> US,A,5 038 833 (BRUNNNHOFFER) 13 August 1991 cited in the application see claims 1-13	1,14-17, 26,29, 32,45,47	---		-/--
Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claims No. ¹³															
X	DE,C,3 827 092 (TECHNOFORM CAPRANO ET AL.) 7 September 1989 see the whole document	1															
A	<div style="text-align: center;">---</div> US,A,5 076 329 (BRUNNNHOFFER) 31 December 1991 cited in the application see the whole document	2,3,11, 12,14, 26,32,47															
A	<div style="text-align: center;">---</div> US,A,5 038 833 (BRUNNNHOFFER) 13 August 1991 cited in the application see claims 1-13	1,14-17, 26,29, 32,45,47															
---		-/--															
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>* Special categories of cited documents : ¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 50%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>																	
IV. CERTIFICATION <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; border: 1px solid black; padding: 5px;"> Date of the Actual Completion of the International Search <div style="text-align: center; font-weight: bold; font-size: 1.2em;">14 SEPTEMBER 1993</div> </td> <td style="width: 50%; border: 1px solid black; padding: 5px;"> Date of Mailing of this International Search Report <div style="text-align: center; font-weight: bold; font-size: 1.2em;">13. 10. 93</div> </td> </tr> <tr> <td style="border: 1px solid black; padding: 5px;"> International Searching Authority <div style="text-align: center; font-weight: bold;">EUR PEAN PATENT FFICE</div> </td> <td style="border: 1px solid black; padding: 5px;"> Signature of Authorized Officer <div style="text-align: center; font-weight: bold;">ANGIUS P.</div> </td> </tr> </table>			Date of the Actual Completion of the International Search <div style="text-align: center; font-weight: bold; font-size: 1.2em;">14 SEPTEMBER 1993</div>	Date of Mailing of this International Search Report <div style="text-align: center; font-weight: bold; font-size: 1.2em;">13. 10. 93</div>	International Searching Authority <div style="text-align: center; font-weight: bold;">EUR PEAN PATENT FFICE</div>	Signature of Authorized Officer <div style="text-align: center; font-weight: bold;">ANGIUS P.</div>											
Date of the Actual Completion of the International Search <div style="text-align: center; font-weight: bold; font-size: 1.2em;">14 SEPTEMBER 1993</div>	Date of Mailing of this International Search Report <div style="text-align: center; font-weight: bold; font-size: 1.2em;">13. 10. 93</div>																
International Searching Authority <div style="text-align: center; font-weight: bold;">EUR PEAN PATENT FFICE</div>	Signature of Authorized Officer <div style="text-align: center; font-weight: bold;">ANGIUS P.</div>																

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
A	US,A,4 303 457 (H. A. JOHANSEN ET AL.) 1 December 1981 see abstract see column 3, line 7-12 ---	1-6,14, 22-25, 29-41,47
A	FR,A,2 114 550 (MANNESMANN AG) 30 June 1972 see claims 1-6 -----	1,2,8

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.**

US 9305531
SA 76624

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 14/09/93

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE-C-3827092	07-09-89	None	
US-A-5076329	31-12-91	DE-C- 4001125	13-12-90
		DE-C- 4001126	13-12-90
		DE-U- 9007303	20-12-90
		EP-A- 0428833	29-05-91
		EP-A- 0428834	29-05-91
		JP-A- 3177683	01-08-91
		JP-A- 3177684	01-08-91
		US-A- 5167259	01-12-92
US-A-5038833	13-08-91	DE-A- 3510395	25-09-86
		FR-A- 2579290	26-09-86
		JP-B- 4055392	03-09-92
		JP-A- 61248739	06-11-86
US-A-4303457	01-12-81	AU-A- 1836476	13-04-78
		BE-A- 846234	31-12-76
		CA-A- 1049424	27-02-79
		DE-A, C 2642442	21-04-77
		FR-A, B 2327479	06-05-77
		GB-A- 1562435	12-03-80
		JP-A- 52046516	13-04-77
FR-A-2114550	30-06-72	BE-A- 775432	16-03-72
		DE-A- 2057709	31-05-72
		LU-A- 64262	02-06-72
		NL-A- 7115863	19-05-72

EPO FORM P0679

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82